



Lecture 6 – Regular Expressions and Languages

COSE215: Theory of Computation

Jihyeok Park



2023 Spring

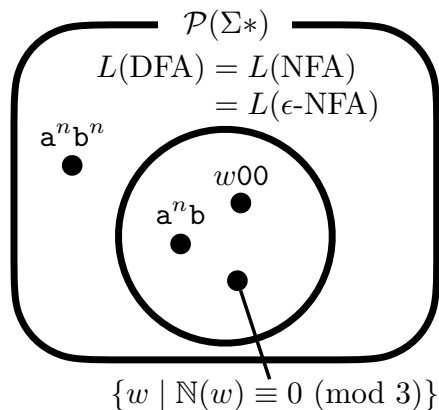

\rightarrow : Subset Construction

1. Operations in Languages

- Union

- Concatenation

- Kleene Star

2. Regular Expressions

- Definition

- Language of Regular Expressions

- Extended Regular Expressions

- Examples

- The **union** of languages:

$$L_1 \cup L_2$$

- The **concatenation** of languages:

$$L_1 \cdot L_2 = \{w_1 w_2 \mid w_1 \in L_1 \wedge w_2 \in L_2\}$$

- The **Kleene star** of a language:

$$L^* = L^0 \cup L^1 \cup L^2 \cup \dots = \bigcup_{n \geq 0} L^n$$

$$L_1 = \{a^n \mid n \geq 0\} \quad L_2 = \{b^n \mid n \geq 0\}$$

$$L_1 \cup L_2 = \{a^n \text{ or } b^n \mid n \geq 0\}$$

$$L_1 \cdot L_2 = \{a^n b^m \mid n, m \geq 0\}$$

$$L_1^* = L_1 = \{a^n \mid n \geq 0\}$$

Definition (Regular Expressions)

A **regular expression** over a set of symbols Σ is inductively defined as follows:

- **(Basis Case)** \emptyset , ϵ , and $a \in \Sigma$ are regular expressions.
- **(Induction Case)** If R_1 and R_2 are regular expressions, then so are $R_1 \mid R_2$, $R_1 \cdot R_2$, R^* , and (R) .

$R ::= \emptyset$	(Empty)	
ϵ	(Epsilon)	$a \mid \epsilon \cdot b^*$
a	(Symbol)	
$R \mid R$	(Union)	$(a \mid \epsilon) \cdot b^*$
$R \cdot R$	(Concatenation)	
R^*	(Kleene Star)	Precedence of operators:
(R)	(Parentheses)	$\mid < \cdot < *$

```
// The type definitions of symbols
type Symbol = Char

// The definition of regular expressions
trait RE
case class REEmpty() extends RE
case class REEpsilon() extends RE
case class RESymbol(symbol: Symbol) extends RE
case class REUnion(left: RE, right: RE) extends RE
case class REConcat(left: RE, right: RE) extends RE
case class REStar(re: RE) extends RE
case class REParen(re: RE) extends RE

// Two examples of regular expressions
val re1: RE = REUnion(
  RESymbol('a'),
  REConcat(REEpsilon(), REStar(RESymbol('b'))),
)
val re2: RE = REConcat(
  REParen(REUnion(RESymbol('a'), REEpsilon())),
  REStar(RESymbol('b')),
)
```

Definition (Language of Regular Expressions)

For a given regular expression R on a set of symbols Σ , the **language** $L(R)$ of R is inductively defined as follows:

$$\begin{array}{ll}
 L(\emptyset) & = \emptyset & L(R_1 \mid R_2) & = L(R_1) \cup L(R_2) \\
 L(\epsilon) & = \{\epsilon\} & L(R_1 \cdot R_2) & = L(R_1) \cdot L(R_2) \\
 L(a) & = \{a\} & L(R^*) & = L(R)^* \\
 & & L((R)) & = L(R)
 \end{array}$$

$$\begin{aligned}
 L(a \mid \epsilon \cdot b^*) & = L(a) \cup L(\epsilon \cdot b^*) & = \{a\} \cup L(\epsilon) \cdot L(b^*) \\
 & = \{a\} \cup \{\epsilon\} \cdot L(b)^* & = \{a\} \cup \{\epsilon\} \cdot \{b\}^* \\
 & = \{a\} \cup \{b\}^* & = \{a \text{ or } b^n \mid n \geq 0\}
 \end{aligned}$$

$$\begin{aligned}
 L((a \mid \epsilon) \cdot b^*) & = L((a \mid \epsilon)) \cdot L(b^*) & = L(a \mid \epsilon) \cdot L(b)^* \\
 & = (L(a) \cup L(\epsilon)) \cdot L(b)^* & = (\{a\} \cup \{\epsilon\}) \cdot \{b\}^* \\
 & = \{ab^n \text{ or } b^n \mid n \geq 0\}
 \end{aligned}$$

More operators:

$$\begin{array}{l} R ::= \dots \\ \quad | R^+ \quad (\text{Kleene plus}) \\ \quad | R^? \quad (\text{Optional}) \end{array}$$

Actually, they are just **syntactic sugar** for the existing operators:

$$L(R^+) = L(RR^*) = L(R) \cdot L(R^*)$$

$$L(R^?) = L(R|\epsilon) = L(R) \cup L(\epsilon)$$

For examples,

$$L(a^+) = L(aa^*) = L(a) \cdot L(a^*) = \{a\} \cdot \{a\}^* = \{a^n \mid n \geq 1\}$$

$$L(b^?) = L(b|\epsilon) = L(b) \cup L(\epsilon) = \{b\} \cup \{\epsilon\} = \{b, \epsilon\}$$

- $L = \{\epsilon, a\}$
- $L = \{w \in \{0, 1\}^* \mid w \text{ contains at least two } 0\text{'s}\}$
- $L = \{w \in \{0, 1\}^* \mid w \text{ contains exactly two } 0\text{'s}\}$
- $L = \{w \in \{0, 1\}^* \mid w \text{ has three consecutive } 0\text{'s}\}$
- $L = \{w \in \{a, b\}^* \mid a \text{ and } b \text{ alternate in } w\}$

- $L = \{a^n b^m \mid n \geq 3 \wedge m \equiv 0 \pmod{2}\}$
- $L = \{a^n b^m \mid n + m \equiv 0 \pmod{2}\}$
- $L = \{w \in \{0, 1\}^* \mid \text{the number of 0's is divisible by 3}\}$
- $L = \{w \in \{0, 1\}^* \mid \mathbb{N}(w) \equiv 0 \pmod{3}\}$
where $\mathbb{N}(w)$ is a natural number represented by w .

$$(0|1(01^*0)^*1)^*$$

- $L = \{a^n b^n \mid n \geq 0\}$ – IMPOSSIBLE (\nexists RE $R. L(R) = L$)

- Please see <https://github.com/ku-plrg-classroom/docs/tree/main/fa-examples>.
- You don't have to submit it. This is just exercise for your practice.
- The goal is to implement the finite automata (FA) objects in the `Implementation.scala` file.

1. Operations in Languages

Union

Concatenation

Kleene Star

2. Regular Expressions

Definition

Language of Regular Expressions

Extended Regular Expressions

Examples

- Equivalence of Regular Expressions and Finite Automata

Jihyeok Park

jihyeok_park@korea.ac.kr

<https://plrg.korea.ac.kr>